



Opticom™ Infrared System

Opticom™ Models 711, 721 and 722 Detectors

Opticom™ Infrared System Matched Component Products


October 2007

Description

The Opticom™ 700 Series Detectors transform the optical energy detected from an approaching, vehicle-mounted Opticom™ Emitter to an electrical signal. The electrical signal is transmitted along a cable to the Opticom™ Phase Selector or Opticom™ Discriminator for processing.

Opticom 700 series detectors are mounted at or near the intersection that permits a direct, unobstructed line-of-sight to vehicle approaches. Opticom detectors may be mounted on span wire, mast arm or other appropriate structures.

Opticom™ Models 711, 721 and 722 Detectors offer significant advances and flexibility for specific intersection applications. The Opticom detectors are designed for common applications in three configurations: one direction—the single channel Opticom model 711; the single channel, dual detection Opticom model 721; and two direction, two output detection—the dual channel Opticom model 722. All Opticom 700 series detectors greatly reduce installation and life cycle costs through their modular design, adjustable tubes, and compatibility with existing Opticom™ Infrared System intersection and vehicle equipment.

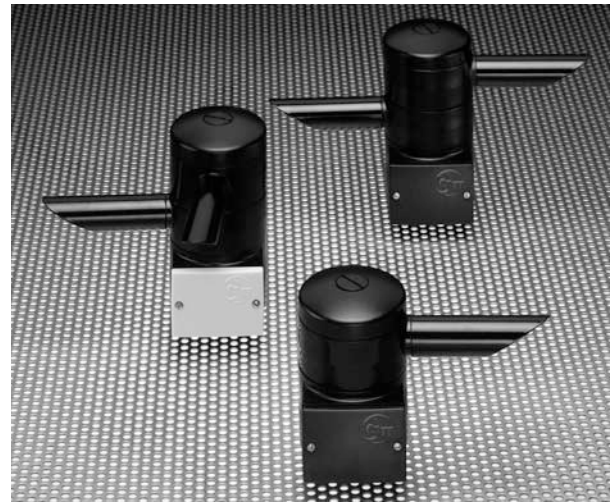

Opticom™ Models 722, 721 (back) and 711 Detectors

Features

- Advanced electrical transient immunity
- Modular design
- Adjustable turret configuration: accommodates skewed approaches
- Lightweight, durable, high-impact polycarbonate enclosure
- Simplified installation: span wire or mast arm
- Gray door identification of Opticom model 722



Opticom™ Span Wire Clamp

Opticom™ Model
138 Detector Cable

Accessories

- Opticom™ Span Wire Clamp
- Opticom™ Model 138 Detector Cable

Operating Parameters

- **Reception Range:** 200 ft. (60 m) adjustable up to 2,500 ft. (760 m)
- **Electrical:** 24 to 28 VDC, 50 MA minimum
- **Temperature Range:** -30° F (-34° C) to 165° F (74° C)
- **Humidity:** 5% to 95% relative

Physical Dimensions

Opticom™ Model 711 Detector

Length: 12.0 in. (30.5 cm)

Width: 4.75 in. (12.1 cm)

Height: 5.63 in. (14.3 cm)

Weight: 0.88 lbs. (400 g)

Opticom™ Models 721 and 722 Detectors

Length: 12.0 in. (30.5 cm)

Width: 4.75 in. (12.1 cm)

Height: 7.13 in. (18.1 cm)

Weight: 1.12 lbs. (508 g)

Important Notice to Purchaser:

EXCEPT FOR THE LIMITED WARRANTIES SET FORTH IN THIS DOCUMENT, GLOBAL TRAFFIC TECHNOLOGIES (GTT) MAKES NO OTHER WARRANTIES AND EXPRESSLY DISCLAIMS ALL OTHER WARRANTIES, WHETHER EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY WARRANTY AS TO MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE.

GTT will, at its sole option, repair, replace or refund any amounts paid for any Opticom™ Infrared System component found to be defective in materials or manufacture within five (5) years from the date of shipment from GTT. See "Warranty and Extended Coverage" for details and limitations of the coverage plan. GTT will provide a functioning replacement component at a standard charge per unit for an additional five (5) years.

GTT warrants future system operability coverage as described herein. The warranties set forth in this document shall not apply to (A) incandescent lamps (confirmation lights) or (B) any Opticom infrared system components which have been (1) repaired or modified by persons not authorized by GTT; (2) subjected to incorrect installation, misuse, neglect or accident; (3) damaged by extreme atmospheric or weather-related conditions; or (4) subjected to events or use outside the normal or anticipated course.

IN NO EVENT SHALL GTT BE LIABLE FOR ANY INJURY (INCLUDING, WITHOUT LIMITATION, PERSONAL INJURY), DEATH, LOSS, OR DAMAGE (INCLUDING, WITHOUT LIMITATION, PROPERTY DAMAGE), WHETHER DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHERWISE, ARISING OUT OF THE USE OR INABILITY TO USE, REPAIR OR FAILURE TO REPAIR, ANY GTT PRODUCT, REGARDLESS OF THE LEGAL THEORY ASSERTED. THE REMEDIES SET FORTH IN THIS DOCUMENT ARE EXCLUSIVE.

Sale and use of the Opticom infrared system is expressly restricted to authorized agencies of government customers, within their specific jurisdictions. However, because the infrared signal generated by the Opticom infrared system is not exclusive, GTT does not warrant exclusive activation by purchaser. Authorized users who desire to use or coordinate use of the Opticom infrared system with that of other jurisdictions must first obtain the prior written approval of each authorized user in the jurisdiction where use is sought.



Global Traffic Technologies, LLC
7800 Third Street North
St. Paul, Minnesota 55128-5441
1-800-258-4610
651-789-7333
www.gtt.com

Global Traffic Technologies Canada, Inc.
157 Adelaide Street West
Suite 448
Toronto, ON M5H 4E7
Canada
1-800-258-4610

Opticom is a trademark of Global Traffic Technologies, LLC.
Used under license in Canada.
Please recycle. Printed in U.S.A.
© Global Traffic Technologies, LLC 2007
All rights reserved.
75-0500-1682-5 (A)